

QS5 Cam Starter

Application

QS5 cam starter is mainly used to start forward or backward and stop directly three-phase asynchronous electric motor with AC 50Hz, voltage up to 500V and capacity up to 7.5KW. It can also be used for changeover from one ind of circuit to the other.

Specification

MODEL	Mark	Rated current(A)	Motor control capacity (HP)	Mechanical life(times)	Frequency of operation (per hr)	Applications	Position of lever
QS5-15A	I-O	15	5.5	250000	200	ON-OFF switching	0-60
QS5-30A		30	10				
QS5-15N	I-O-I	15	5.5				
QS5-30N		30	10			Forward & reverse	60-0-60
QS5-15P/3	I-O-II	15	5.5				
QS5-30P/3		30	10			For 3 pole two circuit	60-0-60
QS5-63A	I-O	63	22	200000	180		
QS5-100A		100	30				
QS5-63N	I-O-I	63	22				
QS5-100N		100	30	Forward & reverse	60-0-60		
QS5-63P/4	I-O-II	63	22				
QS5-100P/4		100	30	For 3 pole two circuit	60-0-60		



QS5-15N



QS5-30N



QS5-63A

CFL1 Changeover Switch

T/J Impoted C Shape Copper Wire Clamp


Application

CFL1 changeover Switch is used to start, stop, forward or backward directly three-phase asynchronous electric motor with AC 50Hz, voltage 230-690v, AC current up to 100A. It can also be used for changeover from one kind of circuit to the other.

Specification

Item No.	Heated Current (Ith)A	Rated Insulated voltage (Ue)V			Rated voltage (v)	Rated Current (A) AC-21		Rated Current (A) AC-23		Rated Controlled Power(kw)
		690	230	400		16	8	5	3	
CFL1-16	16	690	230	400	690	16	8	5	3	
CFL1-25	25	690	230	400	690	25	12	7	5.5	
CFL1-32	32	690	230	400	690	32	16	9	7.5	
CFL1-40	40	690	230	400	690	40	22	12	11	
CFL1-63	63	690	230	400	690	63	40	22	18.5	
CFL1-100	100	690	230	400	690	100	62	32	30	

Dimensions

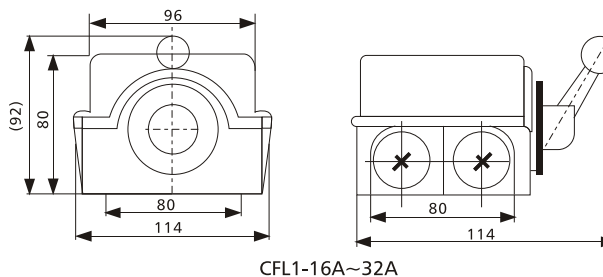

CFL1-16



CFL1-25



CFL1-32



CFL1-63



CFL1-100

