


LC3-D Star-delta Reduced Voltage Starter

Application

LC3-D series star delta reduced voltage starter is suitable for starting motor in the circuit of AC 50/60Hz, voltage up to 660V and current up to 95A. It is provided with a timer for automatic changeover of start-delta to reduce the voltage and current of motor starter. It complies with IEC947-4-1.



LC3-D09
LC3-D12
LC3-D18
LC3-D25
LC3-D32



LC3-D40
LC3-D50
LC3-D65




LC3-D80
LC3-D95


Specification

Type	Rated Operating Current (A)	3-phase Motor Capacity (KW)			
		220V	380V	415V	440V
LC3-D09	9	4	7.5	7.5	7.5
LC3-D12	12	5.5	11	11	11
LC3-D18	18	11	18.5	22	22
LC3-D25	25	11	22	22	22
LC3-D32	32	15	25	25	25
LC3-D40	40	18.5	37	37	37
LC3-D50	50	25	55	59	59
LC3-D65	65	32	55	59	59
LC3-D80	80	37	75	75	75
LC3-D95	95	45	80	80	80

Wiring diagram

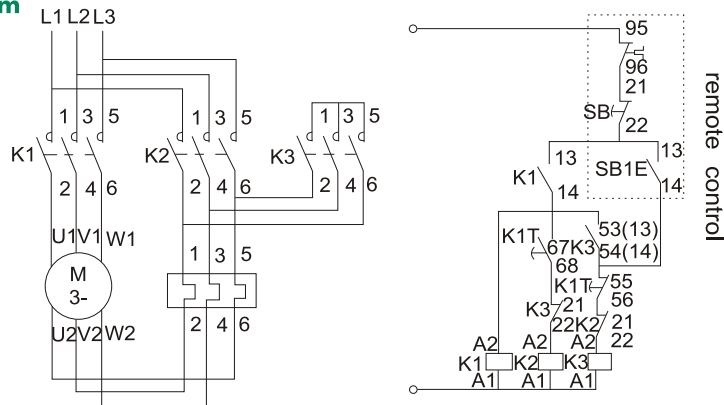

Outline and mounting dimension

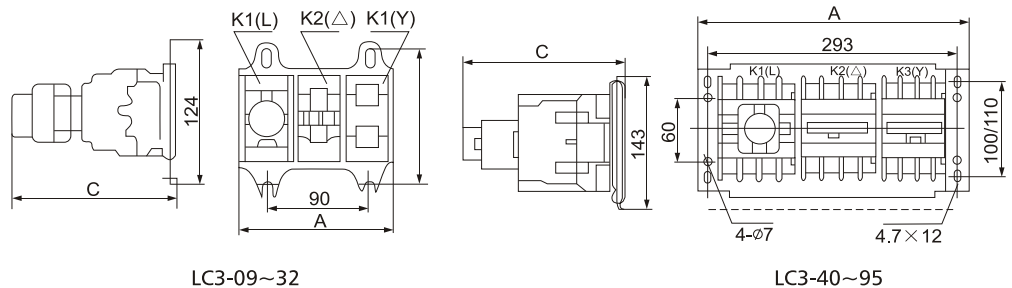

Type	LC3-D09	LC3-D12	LC3-D18	LC3-D25	LC3-D32	LC3-D40	LC3-D50	LC3-D65	LC3-D80	LC3-D95
A	140	140	140	174	174	310	310	310	310	310
C	149	149	154	164	169	185	185	185	196	196