


NS Series Moulded Case Circuit Breaker

Aperture on a front panel

Fitting to fixed and plug-in circuit breaker

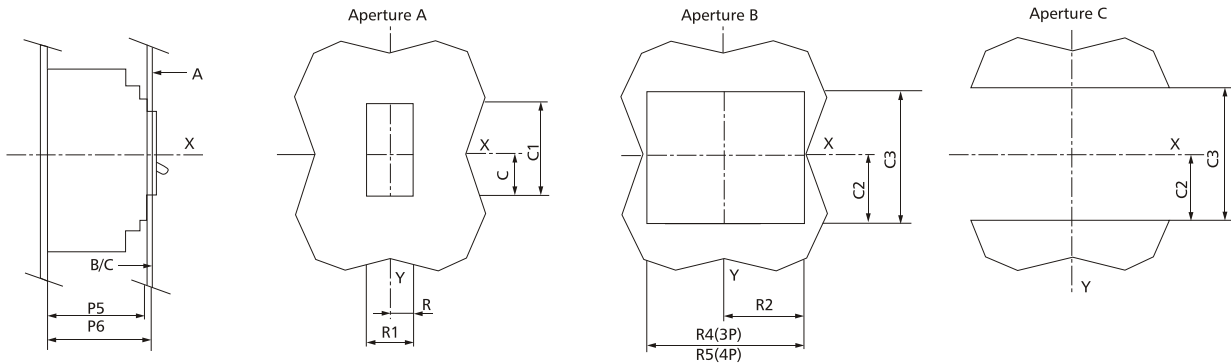

NS-100~630

mm	C	C1	C2	C3	G	G1	G4	G5	H	H1	H2
NS 100/160/250N/H/L	29	76	54	108	62.5	125	70	140	80.5	161	94
NS 400/630N/H/L	41.5	116	92.5	184	100	200	113.5	227	127.5	255	142.5

mm	H3	H4	H5	H6	H7	K	K1	K2	L	L1	L2	P1	P2	P4	P5
NS 100/160/250N/H/L	188	160.5	321	178.5	357	17.5	35	70	52.5	105	140	81	86	111*	83
NS 400/630N/H/L	285	240	480	237	474	22.5	45	90	70	140	185	95.5	110	168	107

mm	P6	R	R1	R2	R4	R5	ΦT	ΦT4	(Ue)
NS 100/160/250N/H/L	88	14.5	29	54	108	143	6	22	≤32
NS 400/630N/H/L	112	31.5	63	71.5	143	188	6	32	≤32

* P4=126 is suitable for NS 250N/H/L

HEB, HQD Moulded Case Circuit Breaker



HEB-100



HQD-225 2P



HQD-225 3P