


# LXW6 Micro Switch 微动开关



接触形式 Contact type




绝缘电阻 insulation resistance	100MΩ DC500V
接触电阻 contact resistance	15mΩ 以下(初期值 Initial value)
耐电压 withstand (50/60Hz 1分钟)	同极端子间 Between the terminals of same pole AC 1,000V
	充电金属部间 between charged metal parts AC 2,000V
	各端子非充电金属部间 between non-charged metal parts of each terminal AC 2,000V
振动 vibration	误动作 misoperation 10~55Hz 复振幅(amplitude) 1.5mm
防护等级 protection degree	IP63

负荷 load	AC 250V	10A
	AC 380V	10A
	DC 125V	5A
	DC 250V	5A
寿命 life	机械的 mechanical	1,500万次 fifteen million times
	电气的 electrical	50万次 five hundred thousand times
操作速度 operation speed		0.05mm~0.5m/s
操作频率 operation frequency	机械的 mechanical	120次/分 (times/m)
	电气的 electrical	20次/分 (times/m)

动作特性 operation speciality	型号 mode	LXW6-11BZ	LXW6-11ZL	LXW6-11HL	LXW6-11DG	LXW6-11CG	LXW6-11CL	LXW6-11DL	LXW6-11DDL
OF 最大(max)		600g	600g	600g	260g	170g	200g	300g	300g
RF 最小(min)		100g	100g	100g	35g	25g	40g	40g	40g
PT 最大(max)		1.6mm	1.6mm	1.6mm	-	-	10mm	-	-
OT 最小(min)		5mm	5mm	5mm	2.5mm	4mm	5mm	2mm	2mm
MD 最大(max)		0.2mm	0.2mm	0.2mm	1.7mm	3mm	3mm	1.5mm	1.5mm
FP 最大(max)		-	-	-	33mm	36mm	51mm	47mm	57.2mm
OP 最大(max)		21.8 ± 1.2mm	33.4 ± 1.2mm	33.4 ± 1.2mm	25 ± 1mm	25 ± 1mm	40 ± 1mm	40 ± 1mm	50 ± 1.2mm

LXW6-11CA

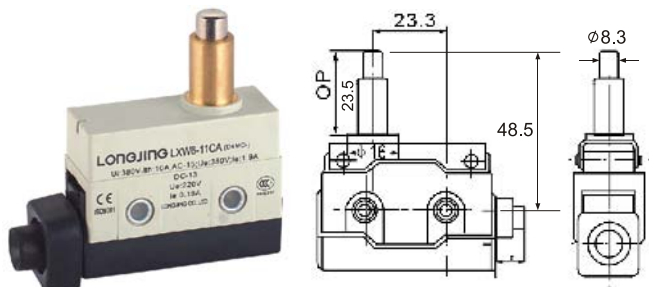

LXW6-11DA

