
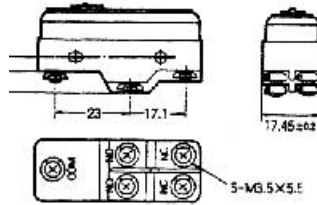



Z-10F Micro Switch 分流式微动开关

接触形式 Contact Type


端子形式




Z-10FWY-B

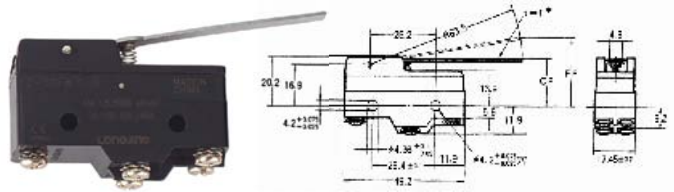


Z-10FY-B

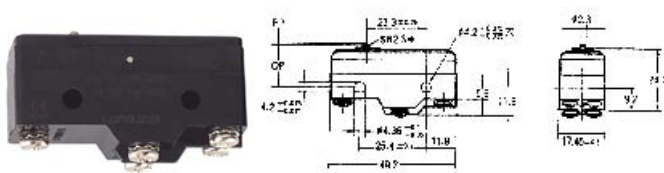


Z-10FSY-B

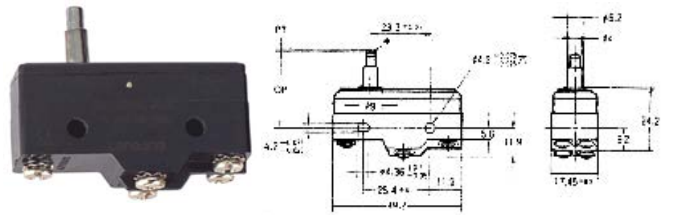


Z-10FDY-B

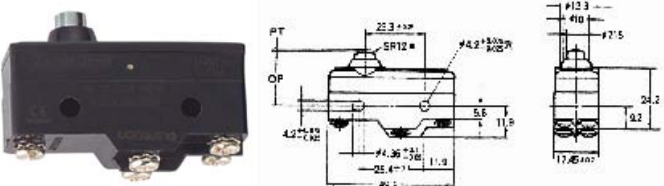


Z-10FQ22Y-B

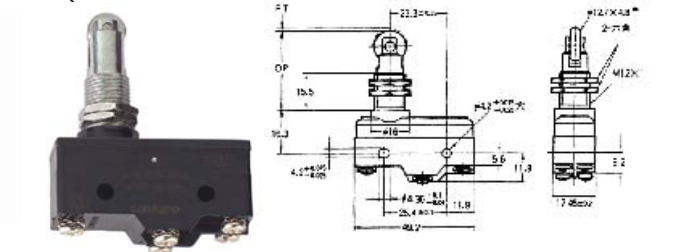


Z-10FQY-B

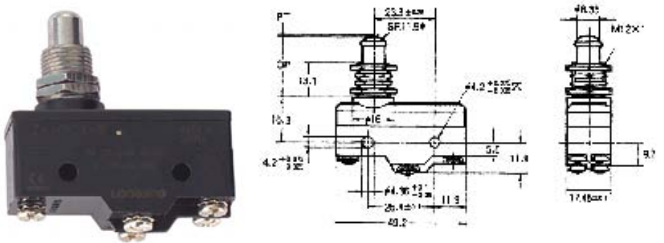


Z-10FQ21Y-B

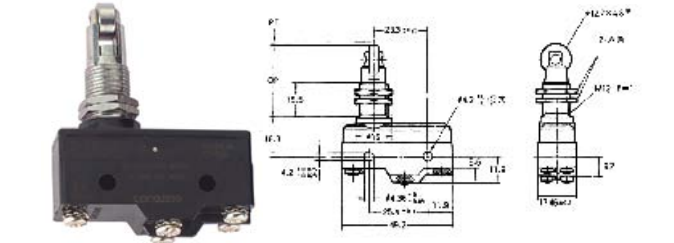

Z-10FW2Y-B

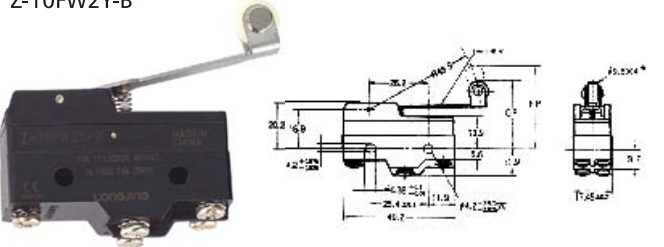

Z-10FW22Y-B

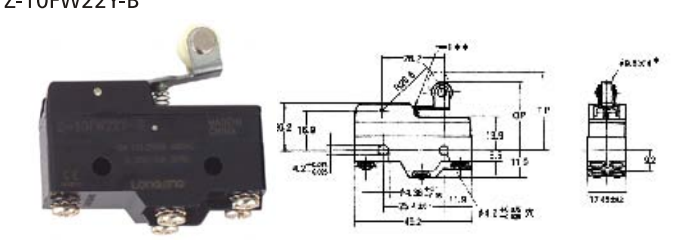

型号 model	Z-10FWY-B	Z-10FW22Y-B	Z-10FW2Y-B	Z-10FY-B	Z-10FSY-B	Z-10FDY-B	Z-10FQY-B	Z-10FQ22Y-B	Z-10FQ21Y-B
动作特性 operation speciality									
OF 最大(max)	90g	250g	130g	455~740g	455~740g	455~740g	455~740g	455~740g	455~740g
RF 最小(min)	14g	35g	22g	114g	114g	114g	114g	114g	114g
PT 最大(max)	-	-	-	0.8mm	0.8mm	0.8mm	0.8mm	1mm	1mm
OT 最小(min)	5.6mm	2.4mm	4mm	0.13mm	1.6mm	1.6mm	1.5mm	3.55mm	3.55mm
MD 最大(max)	2.4mm	1mm	2mm	0.1mm	0.1mm	0.1mm	0.1mm	0.1mm	0.1mm
EP 最大(max)	39.8mm	34.8mm	37.4mm	-	-	-	-	-	-
OP	19±0.8mm	30.2±0.4mm	30.2±0.8mm	15.9±0.4mm	28.2±0.5mm	21.5±0.5mm	21.8±0.8mm	33.4±1.2mm	33.4±1.2mm