

Mounting Enclosures (back Boxes)

All LONGJING Mounting Back Boxes are moulded in UV stabilised rigid RVC to facilitate glueing of fittings for conduit entry.

Ample conduit and cable entries are provided and there is plenty of wiring room for easy installation.

All screwed conduit entries are provided with plugs. The multigang enclosures feature moulded bridges between modules to ensure switches and sockets sit flush on a continuous surface. Moulded dividers are also available for multigang boxes to Segregate services and are standard with 4,6,8,9 and 16 gang enclosures.

Each enclosure has a number of mounting points and 220/10 Sealing Plugs are provided to double insulate mounting screw heads and ensure the IP rating.


Moulded gaskets are supplied with switch and socket modules.

Options available

Resistant Orange-add RO to Catalog Number e.g.56E2 becomes 56E2RO.

Options available

Stainless steel pole mounting bracket kit to suit 56E2, 56E3 and 56E4VH Modules. Catalogue No 56PMK.
Stainless steel mounting feet suit all enclosures. Catalogue Number56MF.

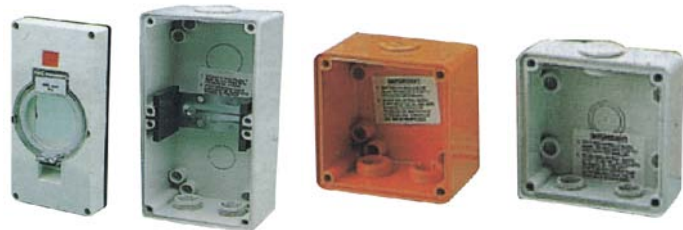

Catalogue Number	No.of Gangs	O/A*Dims. (H)X(W)X(D)	Mouting Points	No.of Conduit Entries(mm)	Cut Out Provision (mm)
56E1	1	101×101×63	8	2×25.1×32	1×25/32
56ES1	1	101×101×38	4	1×25.1×20	1×20/25
56E2	2	198×101×63	8	2×25.1×32	1×25.1/32
56ED2	2	198×101×100	8	2×40	1×25.1/32
56ES2	2	198×101×38	4	1×25.2×32	2×20/25
56E2/4EL	2	198×101×105	8	2×25.1×32	1×25.1×32
56E3	3	294×101×63	16	2×25.1×32	2×25.1×32
56E4	4	198×198×63	16	2×25.2×32	2×25.1×32.1×40
56E4VH	4	391×101×63	16	2×25.1×32	2×25.1×32.1×40
56E6	6	294×198×63	24	2×25.2×32	2×25.2×32.2×40
56E8	8	391×198×63	28	2×25.2×32	4×25.2×32.2×40
56E9	9	294×294×63	28	2×25.2×32	4×25.1×32.1×40
56E16	16	391×391×63	48	2×25.2×32	6×25.6×32.4×40

56E2/3EL denotes an E2 enclosure complete with 56EL4N Cover and DIN rail to suit 4EL RCDs.

Portable combination switched sockets with RCD

Ruggedly constructed, these portable units feature an easy to carry handle, a hanging facility for builder's poles and 3 metres of heavy duty flexible cord.



Catalogue Number	No.of Phases	L _{the} (A)	U _e (V)	No.of Sockets	Tripping Sensitivity	Catalogue Number Matching Plug	Catalogue Number Angled Plug	Overall Dimensions (H)X(W)X(D)	Socket Config
56C310EL2P	1	10	250	2(3 flat pins)	30mA	56P310	-	243×294×105	A
56C310ELP	1	15	250	1(3 flat pins)	30mA	56P315	-	243×195×105	G
56C420ELP	3	20	415	1(4 round pins)	30mA	56P420	56PA420	243×195×105	L
56SO4ELP15	1	10	250	4(auto,3 flat pins)	30mA	56P310	-	243×294×105	A

Refer to page 24& 25 for explanation of pin configurations.

Note: Combinations with various pin configurations, current ratings and 100mA

Special order are available upon request