


Z-15G Micro Switch 微动开关




接触形式 Contact type


Z-15E



Z-15G,H



Z-15P-B




型号 mode	Z-15HW52-B	Z-15HW78-B	Z-15HW24-B	Z-15P-B		Z-15P-B	
动作特性 operation speciality							
OF 最大(max)	6g	4g	6g	200g	570g	200g	570g
RF 最小(min)	0.5g	0.3g	0.5g	114g	114g	114g	114g
PT 最大(max)	8.3g	10mm	19.8mm	0.3g	0.7g	0.3g	0.7g
OT 最小(min)	5.6mm	6mm	10mm	0.14mm	0.14mm	1.6mm	1.6mm
MD 最大(max)	0.65mm	3mm	2mm	0.025mm	0.07mm	0.025mm	0.07mm
OP	19 ± 1mm	20 ± 1mm	19.8 ± 1.6mm	15.9 ± 0.6mm		28.2 ± 0.6mm	

操作速度 operation speed	0.01mm to 1m/swc
工作频率 operation frequency	机械的mechanical: 240次/分(times/m) 电气的electrical: 20次/分(times/m)
绝缘电阻 insulation resistance	100MΩ at 500VDC
接触电阻 contact resistance	20mΩ 以下初始initial
耐电压 voltage withstand	非串联端子间1,000VAC 持续1分钟 1,000VAC,50/60Hz for 1 minute between non-continous terminal 端子间和地间2,000VAC持续1分钟 2,000VAC,50/60Hz for 1 minute between currnet-carrying part and ground
振动vibration	机械承受力: Mechanical durability 双震幅: 10 to 55Hz 1.5mm double amplitude 1.5mm
环境温度 ambient ope rating temperature	普通: general purpose type -25° to +80°
湿湿度humidity	普通: general purpose type 85% RH max
工作寿命service life	机械: Mechanically 20,000,000 operations min 电气: Electrically 500,000 operations min

额定电压 rated voltage (V)	电阻负载 Noninductive load(A)		电感负载 Lnductive load(A)		Inrush current (A)			
	电阻 Resistive load		电感 Inductive				电动负荷 Motor load	
	NC	NO	NC	NO			NC	NO
125 VAC	15		15		5	2.5	30 最大 (max)	15 最大 (max)
250 VAC	15		15		3	1.5		
500 VAC	3		2.50		1.5	0.75		
8 VAC	15		15		5	2.5	30 最大 (max)	15 最大 (max)
14 VAC	15		10		5	2.5		
30 VAC	6(2)		5		5	2.5		
125 VAC	0.4		0.05		0.05	0.05		
250 VAC	0.2		0.03		0.03	0.03		

型号 mode	Z-15G-B	Z-15GL-B	Z-15GL2-B	Z-15GS-B	Z-15GD-B	Z-15GQ-B	Z-15GQ22-B	Z-15GQ21-B	Z-15GQ8-B
OF 最大(max)	350g	150g	150g	350g	350g	350g	350g	350g	250~350g
RF 最小(min)	114g	14g	14g	114g	114g	114g	114g	114g	114g
PT 最大(max)	0.4mm	4mm	4mm	0.4mm	0.4mm	0.4mm	0.4mm	0.4mm	0.5mm
OT 最小(min)	0.13mm	1.6mm	1.6mm	1.6mm	1.6mm	5.5mm	3.58mm	3.58mm	5.5mm
MD 最大(max)	0.05mm	1.3mm	1.3mm	0.05mm	0.05mm	0.05mm	0.05mm	0.05mm	0.05mm
FP 最大(max)	-	20.6mm	31.8mm	-	-	-	-	-	-
OP	15.9 ± 0.4mm	17.4 ± 0.8mm	28.6 ± 0.8mm	28.2 ± 0.6mm	21.6 ± 0.5mm	21.8 ± 0.8mm	33.4 ± 1.2mm	33.4 ± 1.2mm	32.5 ± 1mm

Z/A/X 系列接线盒护罩

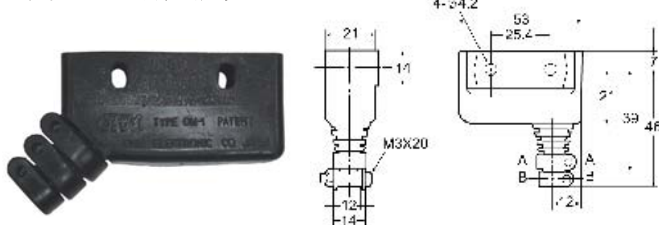

Z-15P-B

